




ŘEZ 1
km 0,000 00

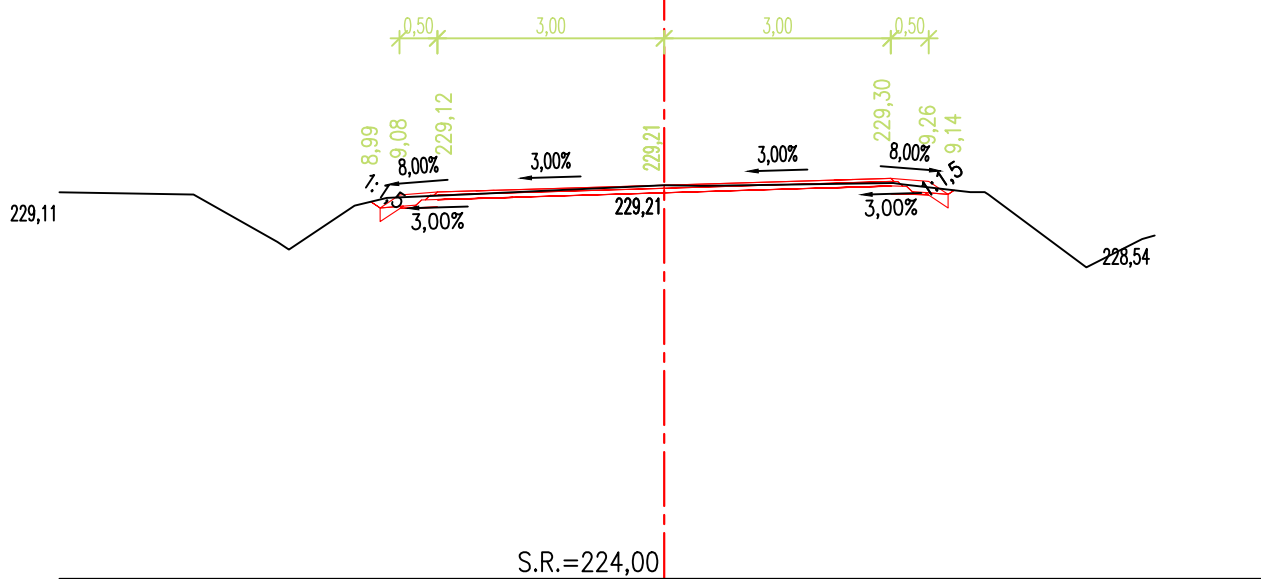


ŘEZ 2
km 0,025 00

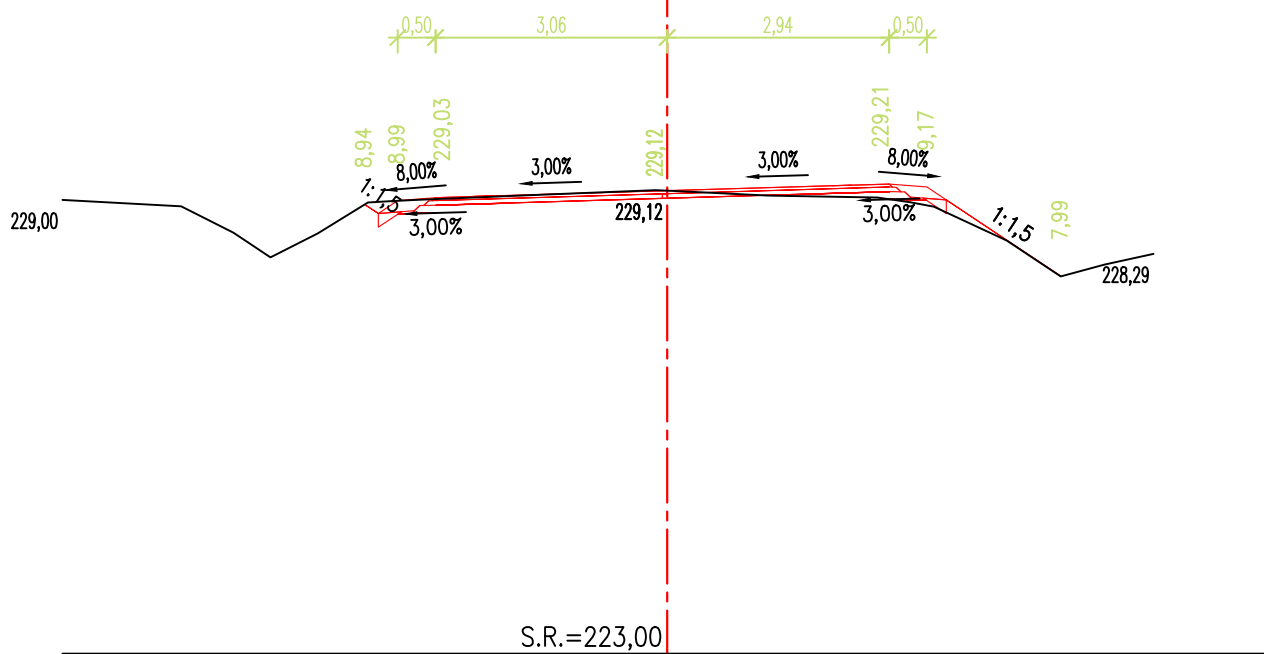


ŘEZ 3
km 0,050 00

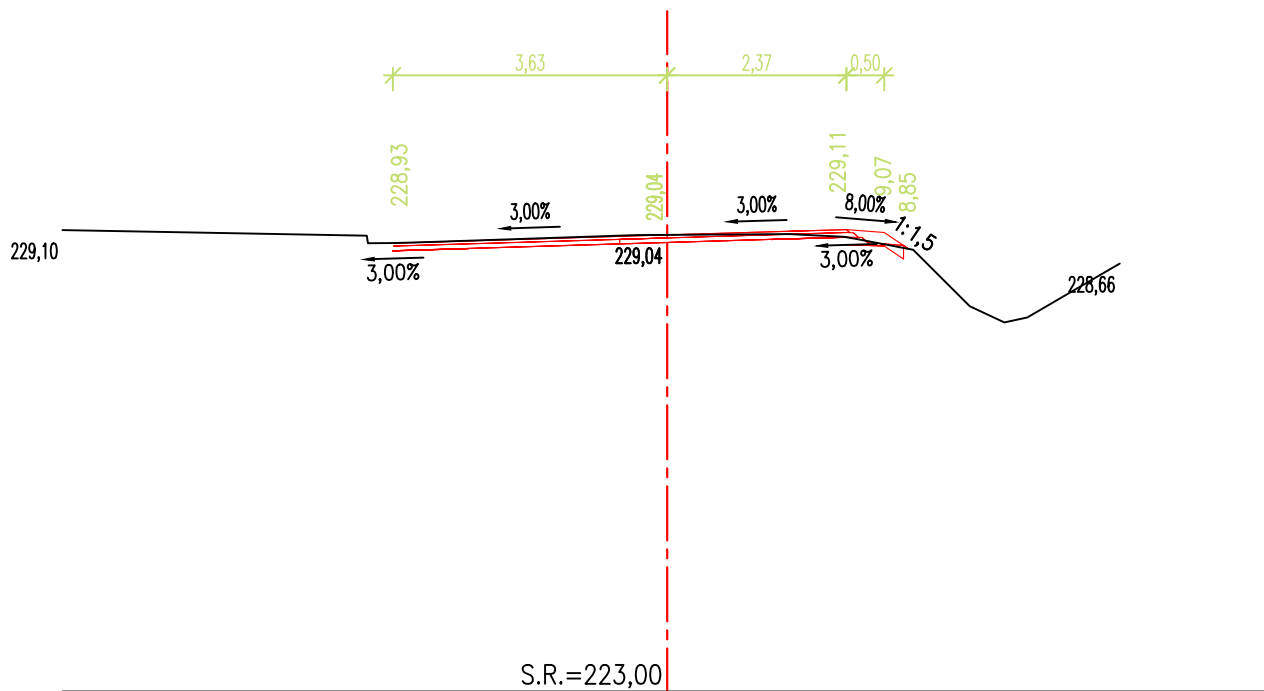


ŘEZ 4
km 0,075 00

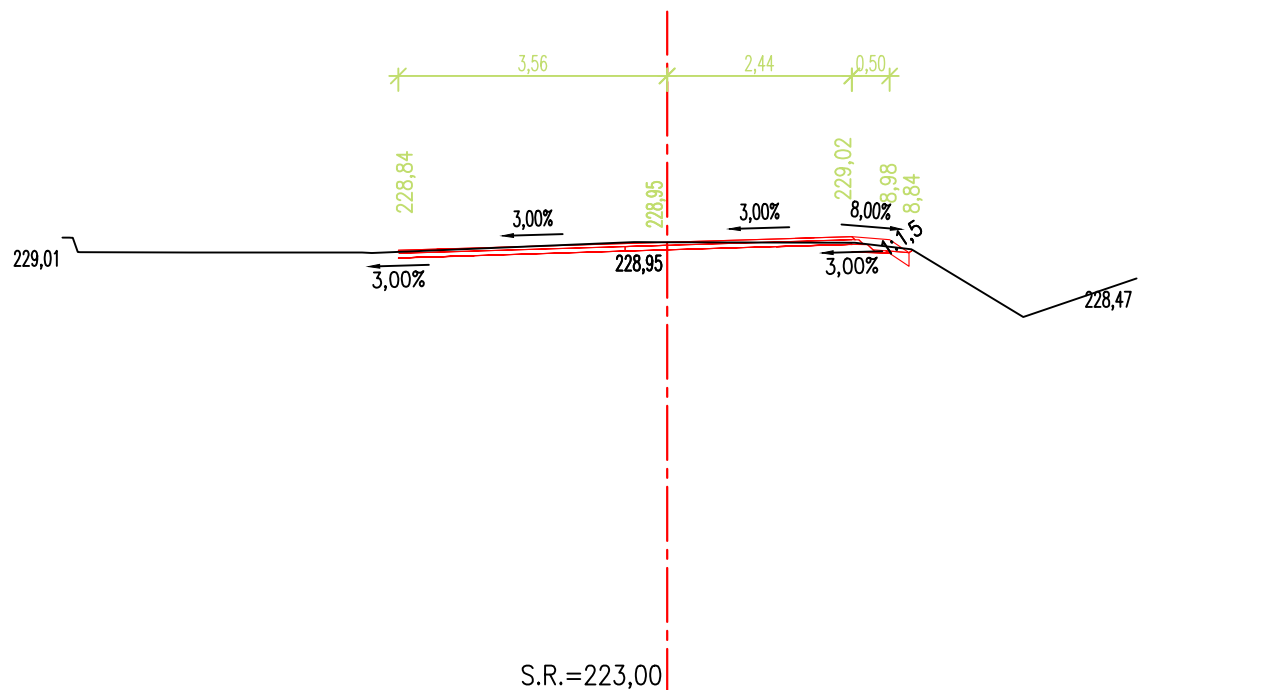

ŘEZ 5 km 0,100 00

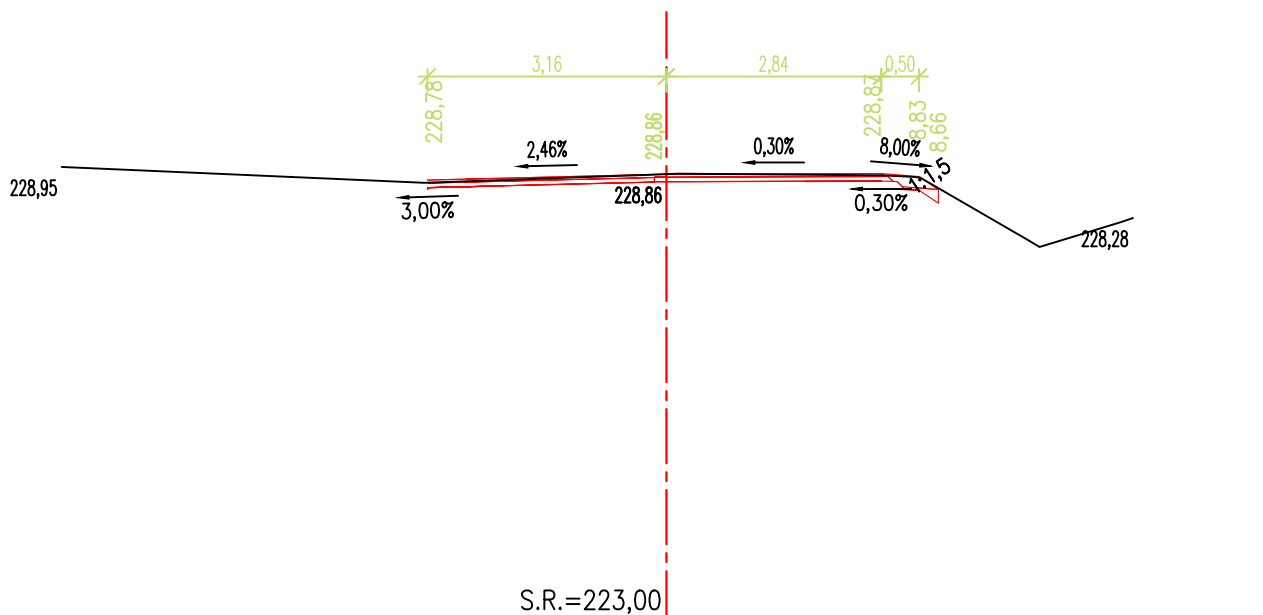


ŘEZ 6 km 0,125 00

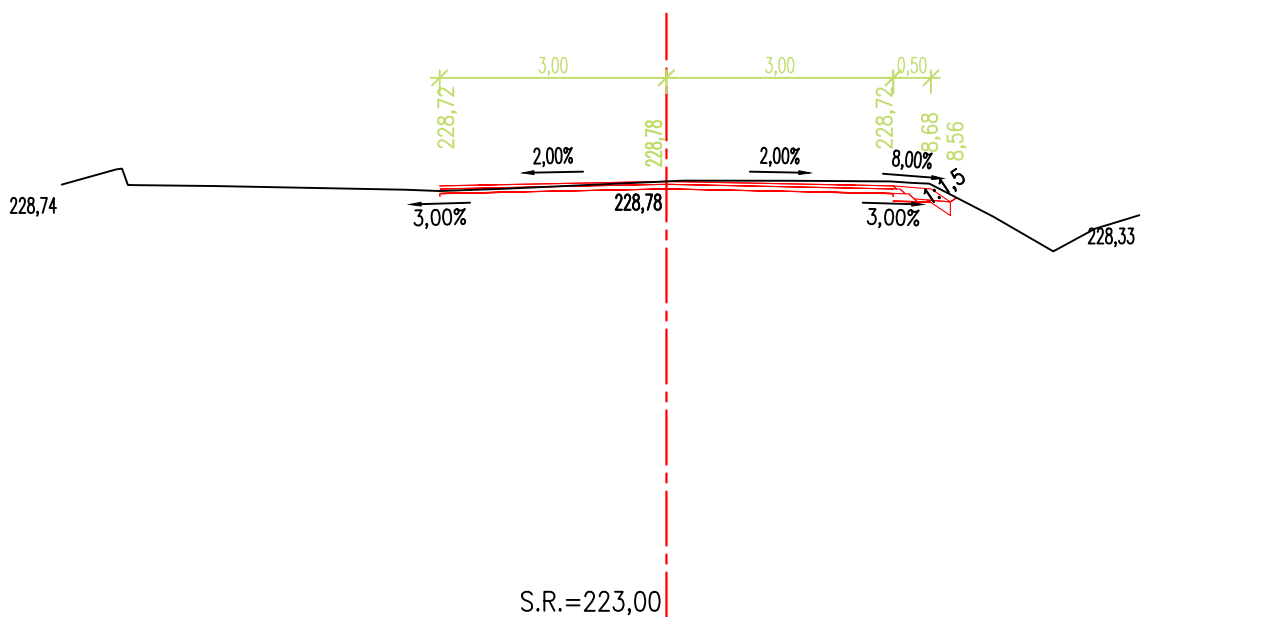


The diagram illustrates a road cross-section with a 3% grade. A central vertical line is labeled $S.R.=223.00$. The road surface is shown with a 3% grade, a 2% dip, and a 0.07% dip. The elevations at the ends of the road are 228.34 and 228.40. The central elevation is 228.73. The distances between the points are 0.50, 3.00, 3.00, and 0.50. The diagram also shows a 3% grade on the left and right sides of the central dip.

Technical drawing of a road cross-section. The road width is 3.00m. The side slopes are 8.00% (indicated by a 1:8 ratio). The cross-fall is 3.00%. The centerline elevation is 223.00 (S.R.=223,00). The drawing shows the road profile, the centerline, and the side slopes. The elevation points are 228.55, 228.78, and 228.41. The side slopes are 8.00% (indicated by a 1:8 ratio). The cross-fall is 3.00%.


ŘEZ 9
km 0,200 00

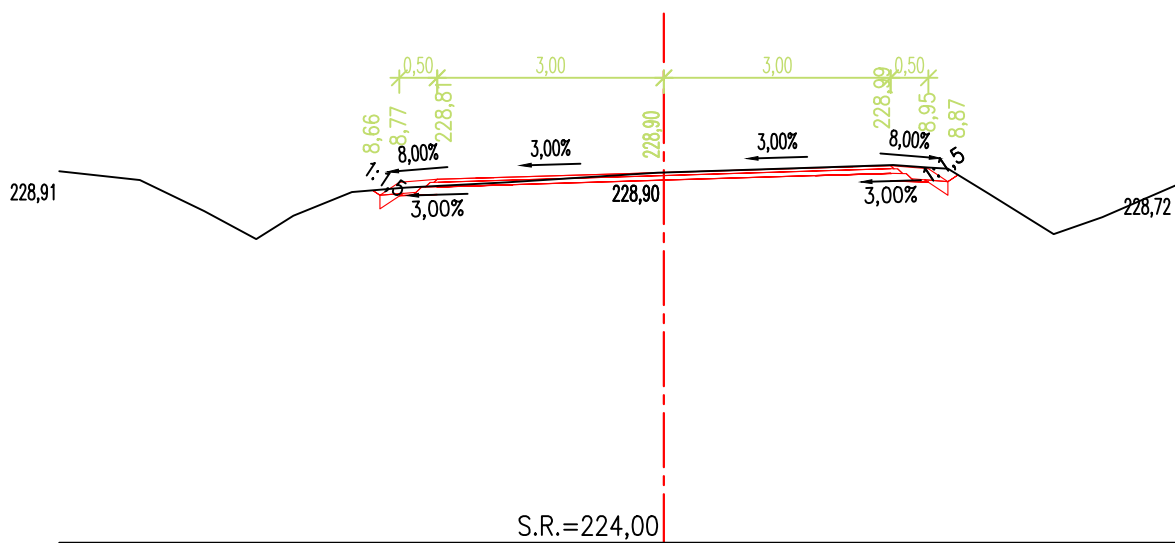

ŘEZ 10
km 0,225 00

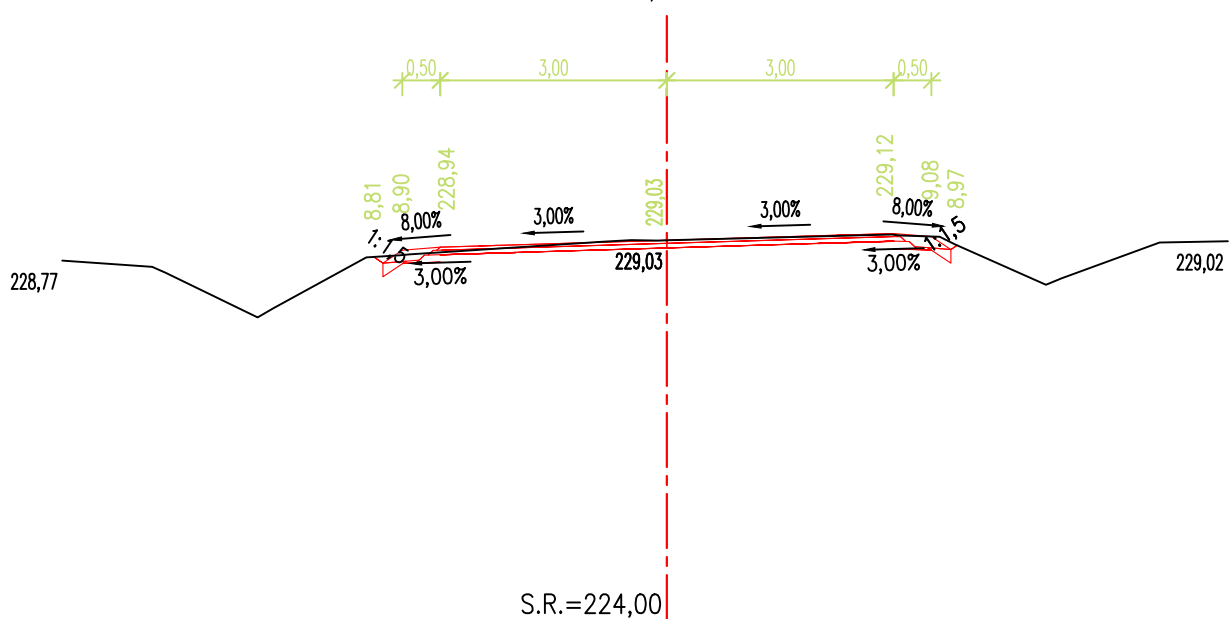

ŘEZ 11
km 0,250 00

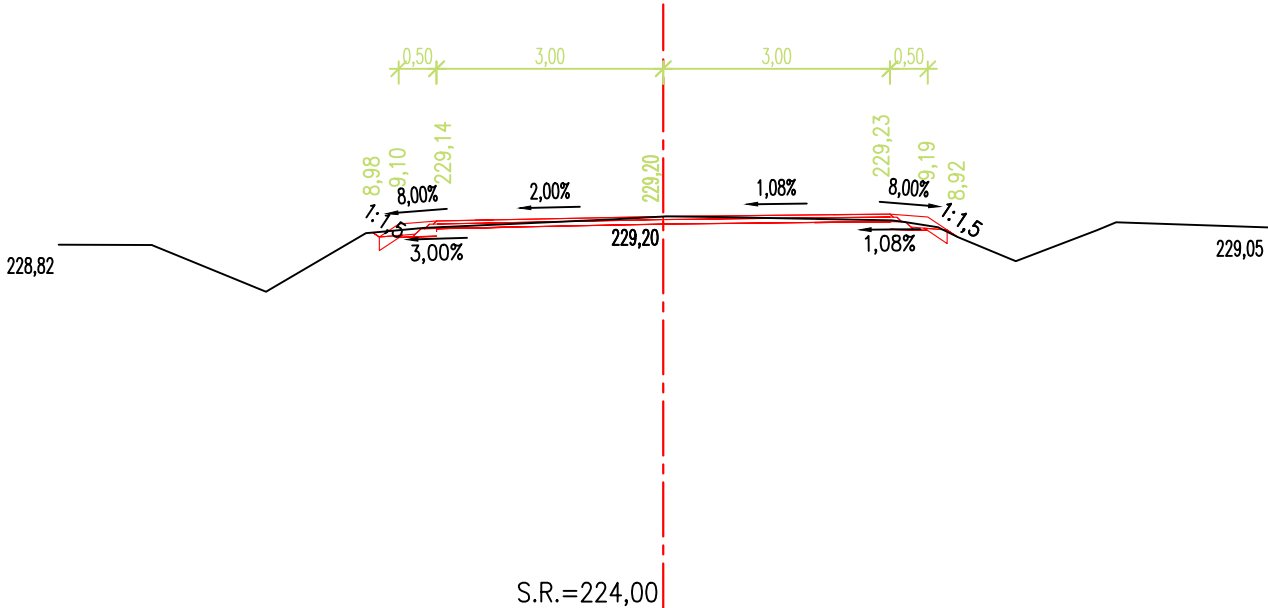

ŘEZ 12
km 0,275 00

